


Circle Logo



Vendor's AD

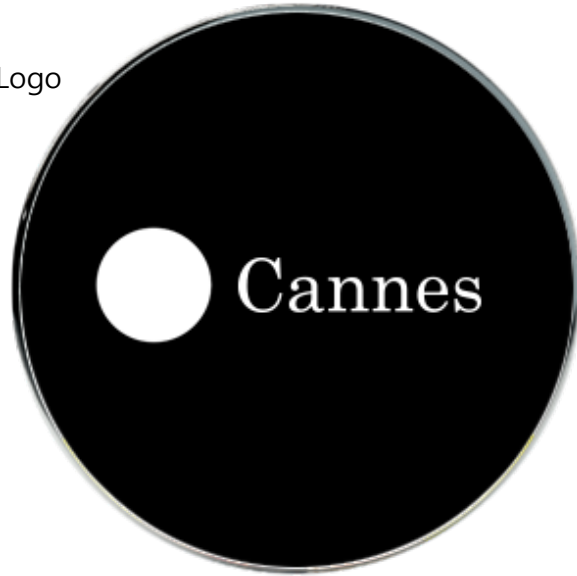

Ultra Slim
9mm/0.35"



Event / Sale

FEATURES

LED Screen : Circle design see thru transparent LED screen

Screen diameter : 1m/39.37" (customized 1.5m, 2m, 2.5m, 3m available)
Chassis diameter : 1m/39.37" (customized 1.5m, 2m, 2.5m, 3m available)

Pitch 3.9mm x 7.8mm high brightness 2,000 nits, 800 nits (indoor only)

No bezel. Ultra Thin 9mm/0.35"

Content Storage 16GB Light Weight 19kgs

Contents uploading : WIFI (including Mobile phone), RJ45, HDMI, USB

Connectivity : RJ45, HDMI, USB

Control contents by mobile phone at place

Networking remote control contents on large number of screens in real time in office.

ADVANTAGES

Beautiful full circle LED screen. Big brands for circle logo. See through transparent LED screen. No block rear view.

Fast ROI by AD fees & increasing revenue. Brighten your circle logo with fantastic circle see thru led screen. High eye catch with beautiful picture quality on beautiful circle see thru led screen.

Display pictures for your logo, new product (new menu) and event on beautiful circle led screen in sequence. No bezel. Ultra Thin 9mm (0.35") only ! Super neat gorgeous with no bezel, ultra thin.

Customized over 1m (1.5m/59.05" ~ any big size) is available

User friendly ! Just power on, beautiful picture is displayed automatically. Managing screen (contents uploading, etc) by mobile phone.

Remote control contents of big number units in real time by server in office. Customized screen sizes available. Save labor cost & time with all in one for installation !

Power on, picture displays automatically ! Big demands with multiple solutions.

DEMANDS

Circle logo big brands (Coke, Burger King, Mercedes, Starbucks, etc), Optical Sunglass Stores, Interior & more

CIRCLED

Sunglass optical Store



Coffee shop



Convenience chain store / Pharmacy chain store



Fast food restaurant



Car dealership



| Model | CL100 | Model | CL100 | |
|--------------------|---|---------------------|-----------------------------|-------------|
| LED | 3in1 SMD Chip | Power Consumption | Average 220W Max 600W | |
| Pixel Pitch | 3.9mm x 7.8mm | Working Temperature | -30°C ~ +50°C | |
| Screen size | Circle diameter 1m (39.37") | Ambient Humidity | 10%-90%RH | |
| resolution | 256 x 128 | Ingress Protection | IP31 | |
| Luminosity | 800 nits (indoor only) / 2,000 nits (window for outdoor street) | Chassis size | Circle diameter 1m (39.37") | |
| Visual Angle | Horizontal 160° / Vertical 160° | | No Bezel | Thickness |
| Content storage | 16GB (built in memory) | | | 9mm (0.35") |
| Processing Depth | 16 bits | weight | 10kgs | |
| Color number | 16 M/28S | | material | aluminum |
| Data refresh rate | 1920Hz | | | |
| Display Mode | synchronous with video source | | | |
| Data Communication | VGA Mapped/NTSC/PAL,JPG,BMP,AVI,WMV,RM etc | | | |
| Lifespan | 100,000 hours (over 15 years) | | | |
| LED Failure Rate | ≤0.00001(Led display line standard<0.0001) | | | |
| Power supply | 100~240v | | | |
| Working Voltage | DC 5V | | | |